



功能：

Function:

风机盘管阀(也称为“区域阀”)用于在加热和冷却系统上拦截、分流或混合水。

Fan coil valves (also known as "area valves") are used to intercept, divert, or mix water in heating and cooling systems

3 - 4通道阀系列可作为分流器或混合阀，

The 3-4 channel valve series can be used as a diverter or mixing valve,

双通道阀用于开启和关闭。

while the dual channel valve is used for opening and closing.

当执行器发出指令时，它们由温控面板控制。

When the actuators issue commands, they are controlled by the temperature control panel

性能特点：

Performance characteristics:

1.阀体小

Small valve body

2.安装方便

Easy installation

3.配执行器自动启停

Automatic start stop with actuator

4.黄铜主体

Brass body

5.EPDM密封件

Sealing element : EPDM

6.不锈钢弹簧

Stainless steel spring

7.温度：5-100°C

Temperature:5-100°C

8.最大工作压力：10Bar

Maximum working pressure: 10Bar


9.最大压差1Bar

Maximum differential pressure:1Bar


10.规格 1/2"3/4"1"

Size : 1/2" 3/4" 1"

尺寸图：
Dimensional drawing

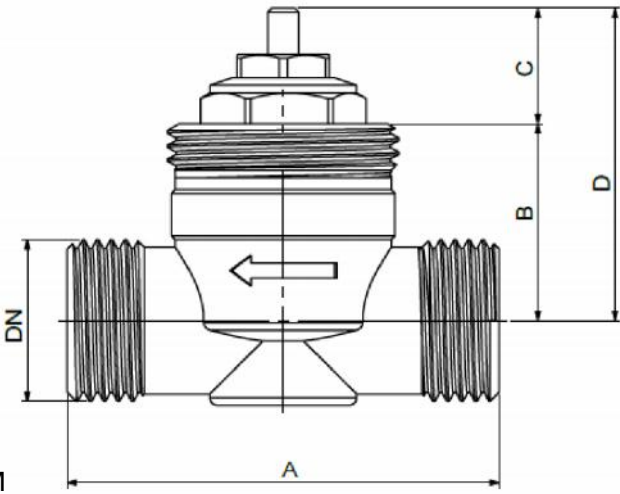


DN	A	B	C	D
1/2"	56	25.5	15	40.5
3/4"	58	24.5	15	39.5
1"	65	24.5	15	39.5

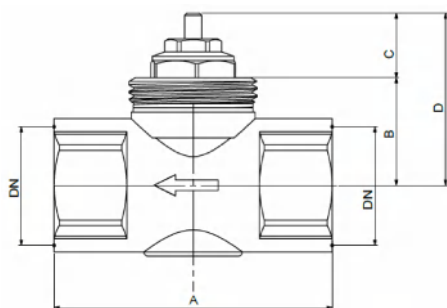


2T:F*F

DN	A	B	C	D
3/4"	65	25	15	40
1"	76	31.5	15	46.5

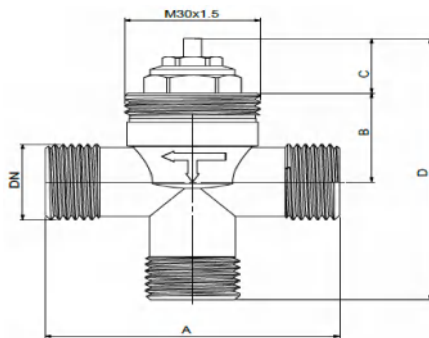


3T:M*M*M

DN	A	B	C	D
1/2"	65	24.5	15	72
3/4"	65	24.5	15	72
1"	65	24.5	15	72

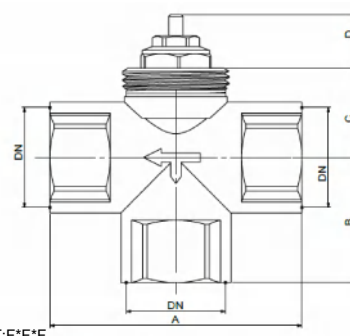



3T:F*F*F

DN	A	B	C	D
3/4"	71	36	18	15
1"	76	41	32	15

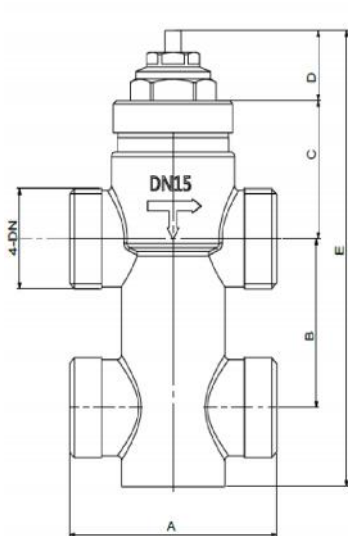

4T:M*M*M

DN	A	B	C	D	E
1/2"	52	35.1	28.7	14.5	94.7
3/4"	56	40	28.7	14.5	102.7

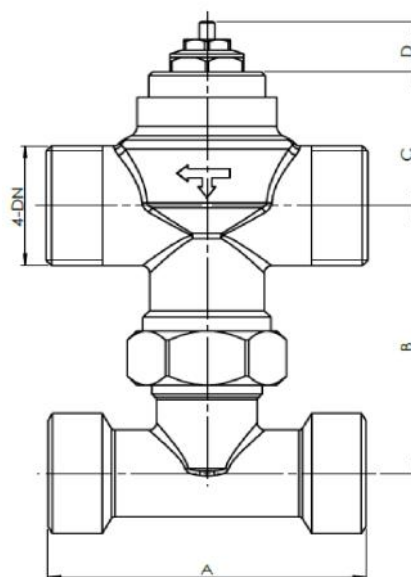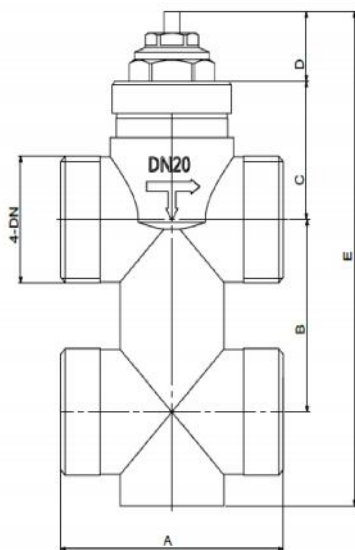

4T:M*M*M

DN	A	B	C	D
1"	82	74	37	14.5

